



NEW

TOP FRAME

Perfect elegance

Top Frame is the new power and data supply solution for conference facilities. Thanks to the foldaway cover, power and data can be conveniently accessed from any seat around the conference table. The balanced geometry of Top Frame fits elegantly into the tabletop, so tables or desks can even be fitted with high-quality veneers. The Top Frame is also elegantly simple to open: just slight pressure from one finger and it opens and closes again without a sound.

With its all-round frame, Top Frame is also suitable for retrofitting.

The power strips can be interchanged in a flash and can be equipped with Bachmann's flexible custom modules.

The advantages at a glance

- Access to power supply and data from any seat
- Silent opening
- Integrated into the top of the desk or table
- Can be installed flush with the top of the desk or table
- Version with all-round frame suitable for retrofitting
- Suitable for veneer finishing
- Configuration can be freely selected
- Complete power strip can be interchanged quickly

**BACH
MANN**

| Art. no. | Price in €* | Version |
|---|-------------|---|
| TOP FRAME Frameless, short - for 4-way PDU, anodised EV1 | | |
| 925.000 | 240,00 | <ul style="list-style-type: none"> · Anodised EV1 aluminium flap, black powder-coated housing · Including fixing accessories · Dimensions (L x W x H): approx. 320 x 185 x 98 mm |
| TOP FRAME Frameless, long - for 8-way PDU, anodised EV1 | | |
| 925.001 | 270,00 | <ul style="list-style-type: none"> · Anodised EV1 aluminium flap, black powder-coated housing · Including fixing accessories · Dimensions (L x W x H): approx. 504 x 185 x 98 mm |
| TOP FRAME Frameless, short - for 4-way PDU, RAL 9006 | | |
| 925.002 | 244,00 | <ul style="list-style-type: none"> · Aluminium flap RAL 9006, black powder-coated housing · Including fixing accessories · Dimensions (L x W x H): approx. 320 x 185 x 98 mm |
| TOP FRAME Frameless, long - for 8-way PDU, RAL 9006 | | |
| 925.003 | 274,00 | <ul style="list-style-type: none"> · Aluminium flap RAL 9006, black powder-coated housing · Including fixing accessories · Dimensions (L x W x H): approx. 504 x 185 x 98 mm |
| TOP FRAME All-round frame, short - for 4-way PDU, RAL 9006 | | |
| 925.500 | 290,00 | <ul style="list-style-type: none"> · Aluminium flap RAL 9006, black powder-coated housing · Including fixing accessories · Dimensions (L x W x H): approx. 341 x 185 x 98 mm |
| TOP FRAME All-round frame, long - for 8-way PDU, RAL 9006 | | |
| 925.501 | 310,00 | <ul style="list-style-type: none"> · Aluminium flap RAL 9006, black powder-coated housing · Including fixing accessories · Dimensions (L x W x H): approx. 523 x 185 mm |



*Non-binding recommended price excl. German sales tax, per unit




TOP FRAME – for an elegant fit.

TOP FRAME is available in different versions: in EV1 anodised aluminium or powder-coated in RAL 9006. Other surface finishes are available on request. A veneer of up to 0.6 mm can also be glued to the flap.

Design

Frameless version (for installation underneath a desk) or with all-round frame (for installation on top of the desk). The frameless version requires precise machining of the tabletop or desktop. For the frame version, a simple cut-out is required in the desktop, as the frame conceals the aperture. TOP FRAME is available as a short version, with the cover measuring approximately 300 mm, or a long version, with the cover measuring approximately 485 mm.

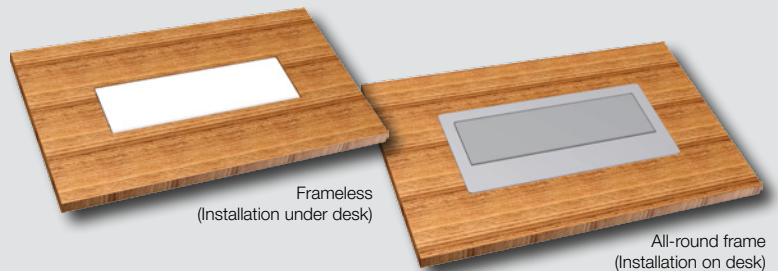

PDU (Power Distribution Unit)

A power strip can be easily fitted in the built-in frame without the need for tools. There is a short version with 4 modules and a long version with 8 modules to suit both TOP FRAME solutions. The power strips for TOP FRAME are identical to the CONFERENCE models. You can find these in the main Bachmann catalogue and in the Bachmann Facility Systems catalogue.

